

10.4" Industrial Flat Panel Display - FP-3500T



TouchPanel Operation

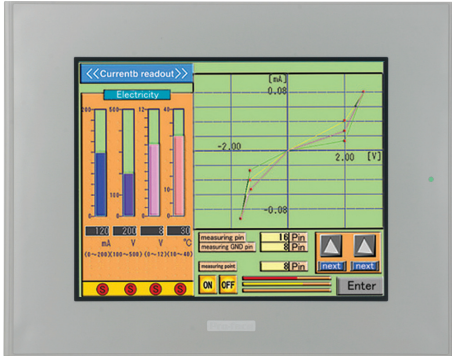


Figure is FP3500-T41

Features:

- VGA Display TFT Touch Panel
- DVI Compatible
- Touch-panel Mouse emulation
- 262,144 colors
- VESA Mounting (75mm)*3
- NEMA 4/4x/12 Rated (IP65F)
- RoHS Directive-conforming
- Bottom USB interface
- UL, cUL, CE (only for DC24V model)

Performance Specifications

Model	FP3500-T11 FP3500-T41-24V
Display Type	TFT Color LCD
Display Colors	262,144 Colors
Display Area	211.2mm [8.31in.] x 158.4mm [6.24in.]
Video	VGA Interface (analog RGB) Connector or DVI-D ¹ Interface Connector
Graphics Display Resolution	VGA (640 x 480 dots)
Backlight	CCFL (Replaceable)
Contrast Adjustment	Adjustable via OSD
Touch Screen	RS-232C or USB (Type B, USB 2.0 compatible)
USB (Type A) ²	Bottom port (USB 2.0 compatible)

*1 Use one or the other.
*2 Available for use when the touch panel USB cable (B type) is connected to a PC.
*3 Need to use Rear cover <CA1-RCVLRG-01>

10.4 1-inch TFT Color LCD
Flat Panel Monitor

FP-3500T AC100/240V 10.4-inch
VGA

Models: FP3500-T11, FP3500-T41-24V

VGA (640 x 480) Analog or DVI-D

*Certifications, except RoHS, outlined for 24V DC unit only.




General Specifications

Model	FP3500-T11	FP3500-T41-24V
Input Voltage	AC100 / 240V (50/60Hz)	DC24V
Power Consumption	AC100 V0.90A or less, AC240 V0.45A or less	2.08A or less
Allowable Voltage Drop	1 cycle or less (Voltage drop interval must be 1s or more.)	Within 10ms
Voltage Endurance	AC1500V 20mA for 1 minute	AC1000V 20mA for 1 minute
Insulation Resistance	DC500V 10MΩ(min.) (between charging and FG terminals)	
Certifications	RoHS	UL508, CE, CSA-C22.2 No.142-M1987, EN55011 Class A, EN61000-6-2, RoHS
Ambient Operating Temperature ⁴	Operating Temperature 0 to 50°C (unit must be installed within 30° of vertical)	
Humidity - Ambient/Storage	10 to 90% RH (Not condensing, wet bulb temperature: 39°C or less).	
Corrosive Gas	Free of corrosive gases	
Noise Immunity	Noise Voltage: 1500Vp-p, Pulse Duration: 1μs, Rise Time: 1ns (via noise simulator)	Noise Voltage: 1000Vp-p, Pulse Duration: 1μs, Rise Time: 1ns
Grounding	100Ω or less	
Electrostatic Discharge Immunity	6kV (complies with EN 61000-4-2)	
Vibration Resistance	JIS B 3502, IEC61131-2 compatible, 5Hz to 9Hz Half Amplitude 3.5mm, 9Hz to 150Hz Constant Acceleration 9.8ms ⁻² , Applied in X, Y and Z directions 10 cycles for 100 minutes	
Rating	Equivalent to IP65f (only for the front area when the panel is installed) ⁵	
Weight	Approx. 3.5kg [7.7lb]	
External Dimensions	317mm [12.48in.] W × 243mm [9.57in.] H × 58mm [2.28in.] D	
Warranty	Two (2) year	

⁴ Ambient Operating Temperature indicates the cabinet interior or panel face temperature.
⁵ Meets IP65f testing requirements. Operation is not, however, guaranteed in every environment.

FP-3500T - External Dimensions

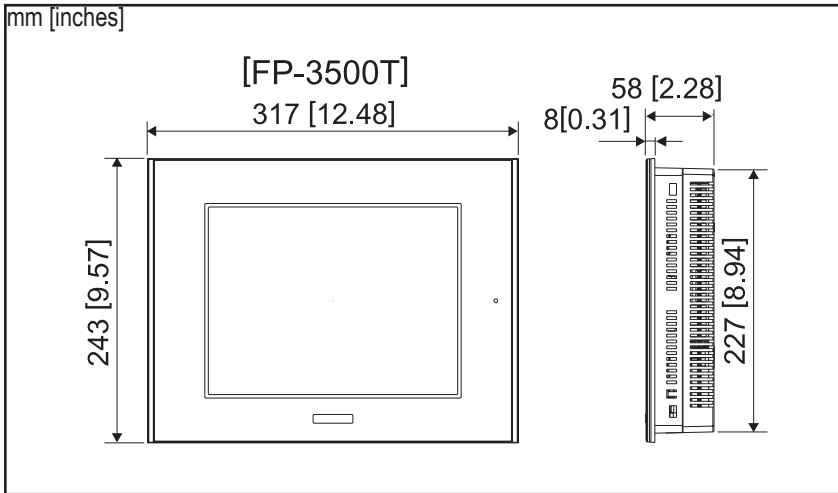

Ordering Information

Part Number	Description
FP3500-T11	10.4" TFT Color LCD, AC
FP3500-T41-24V	10.4" TFT Color LCD, DC24V



Accessories or Replacement Components

Product Name	Part Number
Touch Interface	
Serial Interface Cable	5m FP61V-IS00-O
USB Cable	5m FP-US00
Video Interface	
Analog RGB Cable	4.5m FP-CV02-45
DVI-D Cable	5m FP-DV01-50
Installation Fasteners	GP070-AT01
Backlight (2 pieces/set for 1 unit)	GP577RT-BL00-MS
Screen Protection Sheet (5 sheets/set)	PSL-DF00

Caution: Before operating any of these products, please be sure to read all related manuals thoroughly.

- All product names used in this document are trademarks or registered trademarks of their respective companies.
- All information contained in this document is subject to change without notice.

FP-3500T - Cut-Out Dimensions

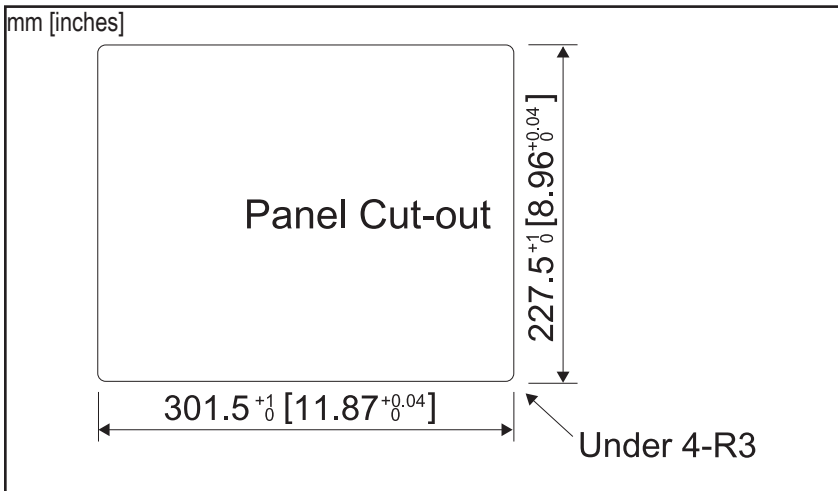

Pro-face America
Phone: 734.429.4971
Fax: 734.429.1010
www.profaceamerica.com

Customer Service Hotline: 734.944.0482

For more information
ACCESS www.profaceamerica.com